


Spherical Roller Bearings

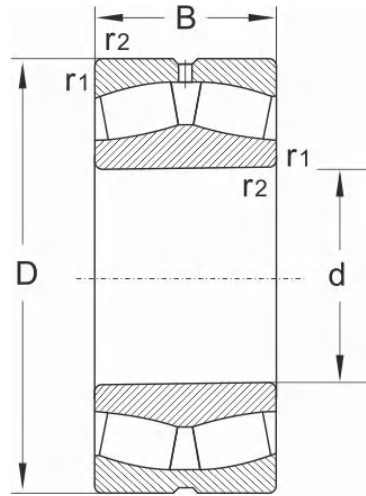

Designation	Dimensions (mm)				Load ratings(KN)		Speed ratings (rpm)		Calculation factors				Mass (kg)
	d	D	B	r1,r2 min	dyn Cr	stat Cor	grease	oil	e	Y1	Y2	Yo	
21304c	20	52	15	1.1	36.5	33.5	8500	10000	0.3	2.3	3.3	2	0.16
22205c	25	52	18	1	43	46	7500	10000	0.35	1.9	2.9	1.8	0.18
22205ck	25	52	18	1	43	46	7500	10000	0.35	1.9	2.9	1.8	0.18
21305c	25	62	17	1.1	44	43	7000	9000	0.28	2.4	3.6	2.4	0.25
22206c	30	62	20	1	59	62	6300	8500	0.36	1.9	2.8	1.9	0.4
22206ck	30	62	20	1	59	62	6300	8500	0.36	1.9	2.8	1.9	0.4
21306c	30	72	19	1.1	62	63	6000	7500	0.27	2.5	3.7	2.4	0.39
22207c	35	72	23	1.1	81	88	5300	7000	0.36	1.9	2.8	1.9	0.41
22207ck	35	72	23	1.1	81	88	5300	7000	0.36	1.9	2.8	1.9	0.41
21307c	35	80	21	1.5	71	73.5	5300	6700	0.26	2.6	3.8	2.5	0.5
21307ck	35	80	21	1.5	71	73.5	5300	6700	0.26	2.6	3.8	2.5	0.5
22208c	40	80	23	1.1	88	98	4800	6300	0.31	2.2	3.2	2.1	0.49
22208ck	40	80	23	1.1	88	98	4800	6300	0.31	2.2	3.2	2.1	0.49
21308c	40	90	23	1.5	99	120	4500	6000	0.26	2.6	3.9	2.6	0.7
21308ck	40	90	23	1.5	99	120	4500	6000	0.26	2.6	3.9	2.6	0.7
22308c	40	90	33	1.5	140	145	4300	5600	0.4	1.6	2.5	2	1.1
22308ck	40	90	33	1.5	140	145	4300	5600	0.4	1.6	2.5	2	1.1
22209c	45	85	23	1.1	93	105	4500	600	0.3	2.3	3.4	2.2	0.54
22209ck	45	85	23	1.1	93	105	4500	6000	0.3	2.3	3.4	2.2	0.54
21309c	45	100	25	1.5	120	135	4000	5300	0.26	2.6	3.9	2.6	0.95

Spherical Roller Bearings

21309ck	45	100	25	1.5	120	135	4000	5300	0.26	2.6	3.9	2.6	0.95
22309c	45	100	36	1.5	165	190	3800	5000	0.4	1.7	2.5	1.6	1.36
22309ck	45	100	36	1.5	165	190	3800	5000	0.4	1.7	2.5	1.6	1.36
22210c	50	90	23	1.1	100	120	4000	5300	0.26	2.6	3.4	2.5	0.61
22210ck	50	90	23	1.1	100	120	4000	5300	0.26	2.6	3.4	2.5	0.61
21310c	50	110	27	2	120	130	3600	4800	0.24	2.8	4.1	2.7	1.25
21310ck	50	110	27	2	120	130	3600	4800	0.24	2.8	4.1	2.7	1.25
22310c	50	110	40	2	190	220	3400	4500	0.4	1.7	2.5	1.6	1.82
22310ck	50	110	40	2	190	220	3400	4500	0.4	1.7	2.5	1.6	1.82
22211c	55	100	25	1.5	120	140	3800	5000	0.27	2.5	3.9	2.5	0.8
22211ck	55	100	25	1.5	120	140	3800	5000	0.27	2.5	3.9	2.5	0.8
21311c	55	120	29	2	135	155	3200	4300	0.24	2.8	4.1	2.7	1.65
21311ck	55	120	29	2	135	155	3200	4300	0.24	2.8	4.1	2.7	1.65
22311c	55	120	43	2	230	265	3000	4000	0.4	1.7	2.5	1.6	2.31
22311ck	55	120	43	2	230	265	3000	4000	0.4	1.7	2.5	1.6	2.31
22212c	60	110	28	1.5	145	175	3400	4500	0.27	2.5	3.8	2.4	1.06
22212ck	60	110	28	1.5	145	175	3400	4500	0.27	2.5	3.8	2.4	1.06
21312c	60	130	31	2.1	150	180	3000	4000	0.24	2.9	4.3	2.8	1.95
21312ck	60	130	31	2.1	150	180	3000	4000	0.24	2.9	4.3	2.8	1.95
22312c	60	130	46	2.1	270	320	2800	3800	0.4	1.7	2.5	1.7	2.93
22312ck	60	130	46	2.1	270	320	2800	3800	0.4	1.7	2.5	1.7	2.93
22213c	60	120	31	1.5	180	220	3000	4000	0.28	2.4	3.7	2.4	1.44
22213ck	60	120	31	1.5	180	220	3000	4000	0.28	2.4	3.7	2.4	1.44
21313c	65	140	33	2.1	196	228	2800	3800	0.24	2.8	4.2	2.8	2.45
21313ck	65	140	33	2.1	196	228	2800	3800	0.24	2.8	4.2	2.8	2.45
22313c	65	140	48	2.1	305	360	2800	3600	0.39	1.7	2.6	1.7	3.54
22313ck	65	140	48	2.1	305	360	2800	3600	0.39	1.7	2.6	1.7	3.54
22214c	70	125	31	1.5	180	225	2800	3800	0.26	2.6	3.6	2.6	1.52
22214ck	70	125	31	1.5	180	225	2800	3800	0.26	2.6	3.6	2.6	1.52
21314c	70	150	35	2.1	250	310	2600	3400	0.23	2.9	4.4	2.9	3.1
21314ck	70	150	35	2.1	250	310	2600	3400	0.23	2.9	4.4	2.9	3.1
22314c	70	150	51	2.1	325	375	2400	3200	0.38	1.8	2.6	1.7	4.19
22314ck	70	150	51	2.1	325	375	2400	3200	0.38	1.8	2.6	1.7	4.19
22215c	75	130	31	1.5	190	250	2800	3800	0.24	2.8	3.9	2.7	1.61
22215ck	75	130	31	1.5	190	250	2800	3800	0.24	2.8	3.9	2.7	1.61

Spherical Roller Bearings

21315c	75	160	37	2.1	280	360	2400	3200	0.23	2.9	4.4	2.9	3.55
21315ck	75	160	37	2.1	280	360	2400	3200	0.23	2.9	4.4	2.9	3.55
22315c	75	160	55	2.1	375	440	2200	3000	0.38	1.9	2.6	1.7	5.21
22315ck	75	160	55	2.1	375	440	2200	3000	0.38	1.9	2.6	1.7	5.21
22216c	80	140	33	2	210	275	2600	3400	0.25	2.6	4.1	2.6	1.97
22216ck	80	140	33	2	210	275	2600	3400	0.25	2.6	4.1	2.6	1.97
21316c	80	170	39	2.1	275	340	2200	3000	0.23	2.9	4.4	2.9	4.25
21316ck	80	170	39	2.1	275	340	2200	3000	0.23	2.9	4.4	2.9	4.25
22316c	80	170	58	2.1	410	500	1800	2400	0.35	1.9	0.9	1.8	6.2
22316ck	80	170	58	2.1	410	500	1800	2400	0.35	1.9	0.9	1.8	6.2
22217c	85	150	36	2	250	325	2400	3200	0.216	2.6	4	0.6	2.47
22217ck	85	150	36	2	250	325	2400	3200	0.216	2.6	4	0.6	2.47
21317c	85	180	41	3	350	450	2200	2800	0.22	3	4.5	2.9	5.1
21317ck	85	180	41	3	350	450	2200	2800	0.22	3	4.5	2.9	5.1
22317c	85	180	60	3	500	620	1800	2400	0.33	2	3	2	7.1
22317ck	85	180	60	3	500	620	1800	2400	0.33	2	3	2	7.1
22218c	90	160	40	2	305	410	2200	3000	0.27	2.5	3.9	2.5	3.18
22218ck	90	160	40	2	305	410	2200	3000	0.27	2.5	3.9	2.5	3.18
23218c	90	160	52	2	340	485	1500	2000	0.34	2	3	2	4.6
23218ck	90	160	52	2	340	485	1500	2000	0.34	2	3	2	4.6
21318c	90	190	43	3	335	415	2200	2800	0.22	3	4.5	2.9	5.8
21318ck	90	190	43	3	335	415	2200	2800	0.22	3	4.5	2.9	5.8
22318c	90	190	64	3	510	620	1800	2400	0.36	1.9	2.8	1.8	8.44
22318ck	90	190	64	3	510	620	1800	2400	0.36	1.9	2.8	1.8	8.44
22219c	95	170	43	2.1	340	450	2200	2800	0.24	2.8	3.8	2.8	3.86
22219ck	95	170	43	2.1	340	450	2200	2800	0.24	2.8	3.8	2.8	3.86
21319c	95	200	45	3	360	450	2000	2600	0.22	3	4.5	3	7.43
21319ck	95	200	45	3	360	450	2000	2600	0.22	3	4.5	3	7.43
22319c	95	200	67	3	580	700	1700	2200	0.35	1.9	2.9	1.8	9.77
22319ck	95	200	67	3	580	700	1700	2200	0.35	1.9	2.9	1.8	9.77
23120MB	100	165	52	2	355	540	2000	3000	0.31	2.2	3.2	2.1	4.5
23120K.MB	100	165	52	2	355	540	2000	3000	0.31	2.2	3.2	2.1	4.5
22220c	100	180	46	2.1	375	500	2200	2800	0.24	2.8	4.2	2.8	4.69
22220ck	100	180	46	2.1	375	500	2200	2800	0.24	2.8	4.2	2.8	4.69
23110c	100	180	60.3	2.1	495	720	1700	2200	0.22	2	3	2	7.34

Spherical Roller Bearings

23220ck	100	180	60.3	2.1	495	720	1700	2200	0.33	2	3	2	7.34
22320c	100	215	73	3	730	960	1500	2000	0.33	2	3	2	12.6
22320ck	100	215	73	3	730	960	1500	2000	0.33	2	3	2	12.6
23022c	110	170	45	2	335	510	2200	3000	0.23	2.9	4.3	2.8	3.54
23022ck	110	170	45	2	335	510	2200	3000	0.23	2.9	4.3	2.8	3.54
23122MB	110	180	56	2	410	640	1800	2400	0.3	2.3	3.3	2.2	5.5
23122K.MB	110	180	56	2	410	640	1800	2400	0.3	2.3	3.3	2.2	5.5
24122c	110	180	69	2	550	900	1200	1600	0.35	1.9	2.9	1.9	6.85
24122ck30	110	180	69	2	550	900	1200	1600	0.35	1.9	2.9	1.9	6.85
22222c	110	200	53	2.1	455	585	2000	2800	0.25	2.7	4.2	2.5	6.7
22222ck	110	200	53	2.1	455	585	2000	2800	0.25	2.7	4.2	2.5	6.7
23222c	110	200	69.8	2.1	620	850	1400	1800	0.33	2	3	2	10.8
23222ck	110	200	69.8	2.1	620	850	1400	1800	0.33	2	3	2	10.8
22322M	110	240	80	3	800	1060	1400	1900	0.37	1.8	2.7	1.8	17.5
22322K.MB	110	240	80	3	800	1060	1400	1900	0.37	1.8	2.7	1.8	17.5
23024c	120	180	46	2	360	570	2200	3000	0.22	3	4.5	3	3.86
23024ck	120	180	46	2	360	570	2200	3000	0.22	3	4.5	3	3.86
24024c	120	180	60	2	460	800	1500	2000	0.29	2.3	3.4	2.3	5.36
24024ck30	120	180	60	2	460	800	1500	2000	0.29	2.3	3.4	2.3	5.36
23124MB	120	200	62	2	495	770	1700	2200	0.31	2.2	3.3	2.2	7.6
23124K.MB	120	200	62	2	495	770	1700	2200	0.31	2.2	3.3	2.2	7.6
24124c	120	200	80	2	630	1050	1000	1300	0.37	1.8	2.7	1.8	10
24124ck30	120	200	80	2	630	1050	1000	1300	0.37	1.8	2.7	1.8	10
22224c	120	215	58	2.1	560	800	1700	2200	0.29	2.3	4	2.3	8.44
22224ck	120	215	58	2.1	560	800	1700	2200	0.29	2.3	4	2.3	8.44
23224c	120	215	76	2.1	730	1120	1300	1700	0.35	1.9	2.9	1.8	13.1
23224ck	120	215	76	2.1	730	1120	1300	1700	0.35	1.9	2.9	1.8	13.1
22324M	120	260	86	3	900	1400	1300	1700	0.36	1.8	2.7	1.8	21.9
22324K.MB	120	260	86	3	900	1400	1300	1700	0.36	1.8	2.7	1.8	21.9
23026C	130	200	52	2	455	720	1900	2600	0.23	2.9	4.4	2.9	5.61
23026ck	130	200	52	2	455	720	1900	2600	0.23	2.9	4.4	2.9	5.61
24026c	130	200	69	2	530	900	1200	1600	0.31	2.2	2.3	2.2	7.95
24026ck30	130	200	69	2	530	900	1200	1600	0.31	2.2	2.3	2.2	7.95
23126MB	130	210	64	2	540	860	1500	2000	0.3	2.3	3.3	2.2	8.5
23126K.MB	130	210	64	2	540	860	1500	2000	0.3	2.3	3.3	2.2	8.5

Spherical Roller Bearings

24126c	130	210	80	2	650	1100	900	1200	0.34	2	2.9	1.9	10.6
24126ck30	130	210	80	2	650	1100	900	1200	0.34	2	2.9	1.9	10.6
22226c	130	230	64	3	660	960	1700	2200	0.29	2.3	3.5	2.3	10.5
22226ck	130	230	64	3	660	960	1700	2200	0.29	2.3	3.5	2.3	10.5
23226c	130	230	80	3	830	1270	1300	1700	0.33	2	3	2	15.8
23226ck	130	230	80	3	830	1270	1300	1700	0.33	2	3	2	15.8
22326M	130	280	93	4	1040	1340	1200	1600	0.37	1.8	2.7	1.8	27.1
22326K.MB	130	280	93	4	1040	1340	1200	1600	0.37	1.8	2.7	1.8	27.1
23028C	140	210	53	2	480	780	1900	2600	0.22	3.1	4.6	3	6.04
23028CK	140	210	53	2	480	780	1900	2600	0.22	3.1	4.6	3	6.04
24028C	140	210	69	2	550	990	1100	1500	0.29	2.3	3.5	2.3	8.42
24028CK30	140	210	69	2	550	990	1100	1500	0.29	2.3	3.5	2.3	8.42
23128MB	140	225	68	2.1	600	990	1400	1800	0.3	2.3	3.3	2.2	10.5
23128K.BM	140	225	68	2.1	600	990	1400	1800	0.3	2.3	3.3	2.2	10.5
24128c	140	225	85	2.1	740	1380	1100	1500	0.34	2	2.9	1.9	12.8
24128ck30	140	225	85	2.1	740	1380	1100	1500	0.34	2	2.9	1.9	12.8
22228c	140	250	68	3	730	1080	1400	1900	0.26	2.6	3.5	2.5	13.4
22228ck	140	250	68	3	730	1080	1400	1900	0.26	2.6	3.5	2.5	13.4
23228c	140	250	88	3	915	1370	1370	1700	0.33	2	3	2	20.8
23228ck	140	250	88	3	915	1370	1370	1700	0.33	2	3	2	20.8
22328M	140	300	102	4	1220	1600	1100	1400	0.38	1.7	2.6	1.7	34.1
22328K.MB	140	300	102	4	1220	1600	1100	1400	0.38	1.7	2.6	1.7	34.1
23030c	150	225	56	2.1	530	865	1800	2400	0.22	3.1	4.6	3	7.33
23030ck	150	225	56	2.1	530	865	1800	2400	0.22	3.1	4.6	3	7.33
24030c	150	225	75	2.1	620	1140	1300	1700	0.29	2.3	3.5	2.3	10.5
24030ck30	150	225	75	2.1	620	1140	1300	1700	0.29	2.3	3.5	2.3	10.5
23130MB	150	250	80	2.1	800	1320	1300	1700	0.32	2.1	3.2	2.1	16.3
23130K.MB	150	250	80	2.1	800	1320	1300	1700	0.32	2.1	3.2	2.1	16.3
24130c	150	250	100	2.1	915	1560	1100	1500	0.4	1.7	2.5	1.6	19.9
24130ck30	150	250	100	2.1	915	1560	1100	1500	0.4	1.7	2.5	1.6	19.9
22230c	150	270	73	3	880	1300	1400	1800	0.26	2.6	3.9	2.5	16.9
22230ck	150	270	73	3	880	1300	1400	1800	0.26	2.6	3.9	2.5	16.9
23230c	150	270	96	3	1030	1610	1000	1300	0.38	1.8	2.7	1.7	24.5
23230ck	150	270	96	3	1030	1610	1000	1300	0.38	1.8	2.7	1.7	24.5
22330M	150	320	108	4	1370	1830	1100	1500	0.38	1.7	2.6	1.7	40.9

Spherical Roller Bearings

22330K.MB	150	320	108	4	1370	1830	1100	1500	0.38	1.7	2.6	1.7	40.9
23032c	160	240	60	2.1	600	1000	1600	2000	0.22	3.1	4.6	3	8.9
23032ck	160	240	60	2.1	600	1000	1600	2000	0.22	3.1	4.6	3	8.9
24032c	160	240	80	2.1	720	1320	1000	1300	0.29	2.3	3.4	2.3	12.7
24032ck30	160	240	80	2.1	720	1320	1000	1300	0.29	2.3	3.4	2.3	12.7
23132MB	160	270	86	2.1	930	1510	1200	1600	0.32	2.1	3.2	2.1	20.5
23132K.BM	160	270	86	2.1	930	1510	1200	1600	0.32	2.1	3.2	2.1	20.5
24132c	160	270	109	2.1	1060	1800	1000	1400	0.41	1.7	2.5	1.6	25.4
24132ck30	160	270	109	2.1	1060	1800	1000	1400	0.41	1.7	2.5	1.6	25.4
22232c	160	290	80	3	965	1370	1300	1700	0.26	2.6	3.9	2.5	21.7
22232ck	160	290	80	3	965	1370	1300	1700	0.26	2.6	3.9	2.5	21.7
23232c	160	290	104	3	1180	1830	1200	1600	0.38	1.8	2.7	1.7	31.7
23232ck	160	290	104	3	1180	1830	1200	1600	0.38	1.8	2.7	1.7	31.7
22332M	160	340	114	4	1430	1900	1000	1300	0.37	1.8	2.7	1.8	51.1
22332K.MB	160	340	114	4	1430	1900	1000	1300	0.37	1.8	2.7	1.8	51.1
23034C	170	260	67	2.1	735	1200	1500	1900	0.23	3	4.4	2.9	12.1
2304ck	170	260	67	2.1	735	1200	1500	1900	0.23	3	4.4	2.9	12.1
24034MB	170	260	90	2.1	880	1610	1000	1300	0.34	2	3	2	17.8
24034K30.MB	170	260	90	2.1	880	1610	1000	1300	0.34	2	3	2	17.8
23134MB	170	280	88	2.1	990	1650	1100	1500	0.31	2.2	3.2	2.1	22
23134K.MB	170	280	88	2.1	990	1650	1100	1500	0.31	2.2	3.2	2.1	22
24134c	170	280	109	2.1	1060	1830	750	1000	0.39	1.7	2.6	1.7	26.4
24134ck30	170	280	109	2.1	1060	1830	750	1000	0.39	1.7	2.6	1.7	26.4
22234c	170	310	86	4	1170	175	1200	1600	0.27	2.5	3.9	2.5	26.2
22234ck	170	310	86	4	1170	175	1200	1600	0.27	2.5	3.9	2.5	26.2
23234c	170	310	110	4	1370	2120	900	1200	0.35	1.9	2.9	1.8	35.7
23234ck	170	310	110	4	1370	2120	900	1200	0.35	1.9	2.9	1.8	35.7
22334M	170	360	120	4	1600	2120	900	1200	0.37	1.8	2.7	1.8	59.7
22334K.MB	170	360	120	4	1600	2120	900	1200	0.37	1.8	2.7	1.8	59.7
23936MB	180	250	52	2	440	850	1200	1600	0.2	3.4	5.1	3.3	8.12
23936K,MB	180	250	52	2	440	850	1200	1600	0.2	3.4	5.1	3.3	8.12
23036c	180	280	74	2.1	865	1430	1400	1800	0.23	2.9	4.3	2.8	15.8
23036ck	180	280	74	2.1	865	1430	1400	1800	0.23	2.9	4.3	2.8	15.8
24036MB	180	280	100	2.1	1030	1900	900	1200	0.36	1.9	2.8	1.9	23.4
24036K30.MB	180	280	100	2.1	1030	1900	900	1200	0.36	1.9	2.8	1.9	23.4

Spherical Roller Bearings

23136c	180	300	96	3	1160	1940	1100	1400	0.32	2.1	3.1	2.1	28.4
23136ck	180	300	96	3	1160	1940	1100	1400	0.32	2.1	3.1	2.1	28.4
24136c	180	300	118	3	1460	2590	700	950	0.4	1.7	2.5	1.6	33.8
24136ck30	180	300	118	3	1460	2590	700	950	0.4	1.7	2.5	1.6	33.8
22236c	180	320	86	4	1210	1870	1100	1500	0.26	2.6	3.7	2.5	27.5
22236ck	180	320	86	4	1210	1870	1100	1500	0.26	2.6	3.7	2.5	27.5
23236c	180	320	112	4	1420	2330	1100	1500	0.36	1.9	2.8	1.8	40.8
23236ck	180	320	112	4	1420	2330	1100	1500	0.36	1.9	2.8	1.8	40.8
22336M	180	380	126	4	1750	2360	850	1100	0.37	1.8	2.7	1.8	69.4
22336K.MB	180	380	126	4	1750	2360	850	1100	0.37	1.8	2.7	1.8	69.4
23938MB	190	260	52	2	465	900	1100	1500	0.18	3.7	5.5	3.6	8.46
23938K.MB	190	260	52	2	465	900	1100	1500	0.18	3.7	5.5	3.6	8.46
23038c	190	290	75	2.1	915	1530	1300	1700	0.23	3	4.4	2.9	16.08
23038ck	190	290	75	2.1	915	1530	1300	1700	0.23	3	4.4	2.9	16.08
24038MB	190	290	100	2.1	1080	1980	850	1100	0.34	2	3	2	24.5
24038K30.MB	190	290	100	2.1	1080	1980	850	1100	0.34	2	3	2	24.5
23138MB	190	320	104	3	1320	2290	1100	1400	0.33	2	3	2	35.6
23138K.MB	190	320	104	3	1320	2290	1100	1400	0.33	2	3	2	35.6
24138c	190	320	128	3	1400	2500	670	900	0.41	1.7	2.5	1.6	41.9
24138ck30	190	340	128	3	1400	2500	670	900	0.41	1.7	2.5	1.6	41.9
22238c	190	340	92	4	1200	1830	1100	1400	0.26	2.6	3.9	2.5	37.2
22238ck	190	340	92	4	1200	1830	1100	1400	0.26	2.6	3.9	2.5	37.2
23238c	190	340	120	4	1750	2880	850	1100	0.35	1.9	2.9	1.8	52.4
23238ck	190	400	120	4	1750	2880	850	1100	0.35	1.9	2.9	1.8	52.4
22338M	190	400	132	5	1860	2500	750	1000	0.37	1.8	2.7	1.8	81.2
22338K.MB	190	400	132	5	1860	2500	750	1000	0.37	1.8	2.7	1.8	81.2
23940MB	200	280	60	2.1	525	1020	1100	1400	0.2	3.4	5.1	3.3	11.5
23940K.MB	200	280	60	2.1	525	1020	1100	1400	0.2	3.4	5.1	3.3	11.5
23040c	200	310	82	2.1	1060	1760	1300	1700	0.23	2.9	4.3	2.8	21.5
23040ck	200	310	82	2.1	1060	1760	1300	1700	0.23	2.9	4.3	2.8	21.5
24040MB	200	310	109	2.1	1140	2280	850	1100	0.35	1.9	2.9	1.9	30.5
24040K30.MB	200	310	109	2.1	1140	2280	850	1100	0.35	1.9	2.9	1.9	30.5
23140MB	200	340	112	3	1370	2460	1100	1400	0.35	1.9	2.9	1.9	43.5
23140K.MB	200	340	112	3	1370	2460	1100	1400	0.35	1.9	2.9	1.9	43.5
24140c	200	340	140	3	1770	3000	800	1100	0.35	2	2.9	1.9	52.5

Spherical Roller Bearings

24140ck3	200	340	140	3	1770	3000	800	1100	0.35	2	2.9	1.9	52.5
22240c	200	360	98	4	1250	2020	1100	1400	0.29	2.3	3.9	2.3	44.4
22240ck	200	360	98	4	1250	2020	1100	1400	0.29	2.3	3.9	2.3	44.4
23240c	200	360	128	4	1620	2590	750	1000	0.35	1.9	2.9	1.8	58.4
2324Ock	200	360	128	4	1620	2590	750	1000	0.35	1.9	2.9	1.8	58.4
22340M	200	420	138	5	1910	2750	670	900	0.36	1.8	2.8	1.8	91.8
22340K.MB	200	420	138	5	1910	2750	670	900	0.36	1.8	2.8	1.8	91.8
23944MB	220	300	60	2.1	625	1344	1100	1500	0.18	3.8	5.6	3.7	13
23944K.MB	220	300	60	2.1	625	1344	1100	1500	0.18	3.8	5.6	3.7	13
23044MB	220	340	90	3	1100	2000	900	1200	0.26	2.6	3.8	2.5	31
23044K.MB	220	340	90	3	1100	2000	900	1200	0.26	2.6	3.8	2.5	31
24044MB	220	340	118	3	1400	2700	750	1000	0.34	2	2.9	1.9	39.5
24044K30.MB	220	340	118	3	1400	2700	750	1000	0.34	2	2.9	1.9	39.5
24144MB	220	370	150	4	1900	2450	700	900	0.41	1.6	2.4	1.6	65.5
24144K30.MB	220	370	150	4	1900	2450	700	900	0.41	1.6	2.4	1.6	65.5
23144K.MB	220	370	120	4	1515	2509	1000	1300	0.3	2.3	3.4	2.2	52
23144MB	220	370	120	4	1515	2509	1000	1300	0.3	2.3	3.4	2.2	52
22244C	220	400	108	4	1545	2300	900	1200	0.29	2.3	3.4	2.3	61.4
22244CK	220	400	108	4	1545	2300	900	1200	0.29	2.3	3.4	2.3	61.4
23244C	220	400	144	4	2065	3380	670	900	0.35	1.9	2.9	1.8	79.5
23244CK	220	400	144	4	2065	3380	670	900	0.35	1.9	2.9	1.8	79.5
22344C	220	460	145	5	2380	3407	700	950	0.36	1.8	2.8	1.8	120
22344CK	220	460	145	5	2380	3407	700	950	0.36	1.8	2.8	1.8	120
23948K.MB	240	320	60	2.1	600	1170	1000	1300	0.17	4.1	6	4	14
23948MB	240	320	60	2.1	600	1170	1000	1300	0.17	4.1	6	4	14
23048K.MB	240	360	92	3	1160	2200	800	1000	0.25	2.7	4.1	2.7	33.9
23048MB	240	360	92	3	1160	2200	800	1000	0.25	2.7	4.1	2.7	33.9
24048K.MB	240	360	118	3	1460	2841	750	1000	0.32	2.1	3.1	2.1	42.5
24048MB	240	360	118	3	1460	2841	750	1000	0.32	2.1	3.1	2.1	42.5
24148MB	240	400	160	4	1780	3109	530	700	0.41	1.7	2.5	1.6	79.5
24148K30.MB	240	400	160	4	1780	3109	530	700	0.41	1.7	2.5	1.6	79.5
23148K.MB	240	400	128	4	1705	2863	900	1200	0.3	2.3	3.4	2.2	66
23148MB	240	400	128	4	1705	2863	900	1200	0.3	2.3	3.4	2.2	66
22248C	240	440	120	4	1845	2763	850	1100	0.29	2.3	3.4	2.3	83.2
22248CK	240	440	120	4	1845	2763	850	1100	0.29	2.3	3.4	2.3	83.2

Spherical Roller Bearings

23248C	240	440	160	4	2530	4600	630	850	0.35	1.9	2.9	1.8	109
23248CK	240	440	160	4	2530	4600	630	850	0.35	1.9	2.9	1.8	109
22348M	240	500	155	5	2650	4000	560	750	0.31	2.2	3.3	2.2	151
22348K.MB	240	500	155	5	2650	4000	560	750	0.31	2.2	3.3	2.2	151
23952K.MB	260	360	75	2.1	845	1604	850	1100	0.19	3.5	5.3	3.5	24
23952MB	260	360	75	2.1	845	1604	850	1100	0.19	3.5	5.3	3.5	24
23052k.MB	260	400	104	4	1500	2800	750	950	0.26	2.6	3.9	2.6	49
23052MB	260	400	104	4	1500	2800	750	950	0.26	2.6	3.9	2.6	49
24052K30.MB	260	400	140	4	1775	3494	600	800	0.35	1.9	2.9	1.9	66
24052MB	260	400	140	4	1775	3494	600	800	0.35	1.9	2.9	1.9	66
24152MB	260	440	180	4	2500	5100	480	630	0.42	1.6	2.4	1.6	110
24152K30.MB	260	440	180	4	2500	5100	480	630	0.42	1.6	2.4	1.6	110
24152K.MB	260	440	144	4	2153	3673	850	1100	0.31	2.2	3.3	2.2	92.5
23152MB	260	440	144	4	2153	3673	850	1100	0.31	2.2	3.3	2.2	92.5
22252MB	260	480	130	5	2190	3300	750	1000	0.29	2.3	3.4	2.3	107
22252K.MB	260	480	130	5	2190	3300	750	1000	0.29	2.3	3.4	2.3	107
22352CK	260	540	165	6	3125	4560	600	800	0.36	1.8	2.8	1.8	187
22352CK	260	540	165	6	3125	4560	600	800	0.36	1.8	2.8	1.8	187
23956K.MB	280	380	75	2.1	950	2000	900	1200	0.18	3.8	5.6	3.7	26
23956MB	280	380	75	2.1	950	2000	900	1200	0.18	3.8	5.6	3.7	26
23056K.MB	280	420	106	4	1560	3000	700	900	0.25	2.7	4.1	2.7	52.5
23056MB	280	420	106	4	1560	3000	700	900	0.25	2.7	4.1	2.7	52.5
24056K30.MB	280	420	140	4	2000	4000	560	750	0.33	2	3	2	68.5
24056MB	280	420	140	4	2000	4000	560	750	0.33	2	3	2	68.5
23156K.MB	280	460	146	5	2295	4050	750	1000	0.3	2.3	3.4	2.2	98.5
23156MB	280	460	146	5	2295	4050	750	1000	0.3	2.3	3.4	2.2	98.5
24156MB	280	460	180	5	2635	4848	400	530	0.39	1.7	2.5	1.7	118
24156K30.MB	280	460	180	5	2635	4848	400	530	0.39	1.7	2.5	1.7	118
22256MB	280	500	130	5	2330	3600	700	950	0.29	2.3	3.4	2.3	113
22256K.MB	280	500	130	5	2330	3600	700	950	0.29	2.3	3.4	2.3	113
23256MB	280	500	176	5	2806	4645	480	630	0.35	1.9	2.9	1.8	153
23256K.MB	280	500	176	5	2806	4645	480	630	0.35	1.9	2.9	1.8	153
223560C	280	580	175	6	3530	5208	560	750	0.36	1.8	2.8	1.8	235
22356CK	280	580	175	6	3530	5208	560	750	0.36	1.8	2.8	1.8	235
23960K.MB	300	420	90	3	1175	2261	750	1000	0.2	3.4	5.1	3.3	40

Spherical Roller Bearings

23960MB	300	420	90	3	1960	2261	750	1000	0.2	3.4	5.1	3.3	40
23960K.MB	300	460	118	4	1960	3650	630	800	0.25	2.7	4	2.6	73.6
23060MB	300	460	118	4	1960	3650	630	800	0.25	2.7	4	2.6	73.6
24060K30.MB	300	460	160	4	2385	4702	560	759	0.35	2	2.9	1.9	97
24060MB	300	460	160	4	2385	4702	560	759	0.35	2	2.9	1.9	97
23160K.MB	300	500	160	5	2635	4485	700	950	0.3	2.3	3.4	2.2	129
23160MB	300	500	160	5	2635	4485	700	950	0.3	2.3	3.4	2.2	129
24160MB	300	500	200	5	3213	6011	430	560	0.4	1.7	2.5	1.6	159
24160K30.MB	300	500	200	5	3213	6011	430	560	0.4	1.7	2.5	1.6	159
22260MB	300	540	140	5	2670	4176	670	900	0.29	2.3	3.4	2.3	142
22260K.MB	300	540	140	5	2670	4176	670	900	0.29	2.3	3.4	2.3	142
23964K.MB	320	440	90	3	1215	2409	670	900	0.19	3.6	5.4	3.5	42
23964MB	320	440	90	3	1215	2409	670	900	0.19	3.6	5.4	3.5	42
23064K.MB	320	480	121	4	2040	4000	600	750	0.25	2.7	4.1	2.7	79.5
23064MB	320	480	121	4	2040	4000	600	750	0.25	2.7	4.1	2.7	79.5
24064K30.MB	320	480	160	4	2500	5240	530	700	0.33	2.1	3.1	2	106
24064MB	320	480	160	4	2500	5240	530	700	0.33	2.1	3.1	2	106
23164MB	320	540	176	5	3115	6000	530	670	0.34	2	3	1.9	165
23164K.MB	320	540	176	5	3115	6000	530	670	0.34	2	3	1.9	165
24164MB	320	540	218	5	3750	7300	400	530	0.41	1.7	2.5	1.6	215
24164K30.MB	320	540	218	5	3750	7300	400	530	0.41	1.7	2.5	1.6	215
22264MB	320	580	150	5	3150	5100	630	580	0.29	2.5	3.7	2.5	180
22264K.MB	320	580	150	5	3150	5100	630	580	0.29	2.5	3.7	2.5	180
23264MB	320	580	208	5	4130	7026	430	560	0.35	1.9	2.9	1.8	247
23264K.MB	320	580	208	5	4130	7026	430	560	0.35	1.9	2.9	1.8	247
23968K.MB	340	460	90	3	1306	2691	630	850	0.189	3.8	5.7	3.8	45
23968MB	340	460	90	3	1306	2691	630	850	0.189	3.8	5.7	3.8	45
23068K.MB	340	520	133	5	2360	4500	560	700	0.25	2.7	4	2.6	105
23068MB	340	520	133	5	2360	4500	560	700	0.25	2.7	4	2.6	105
24068K30.MB	340	520	180	5	3100	6550	480	600	0.34	2	2.9	1.9	143
24068MB	340	520	180	5	3100	6550	480	600	0.34	2	2.9	1.9	143
23168K.MB	340	580	190	5	3605	6409	630	850	0.31	2.2	3.2	2.2	212
23168MB	340	580	190	5	3605	6409	630	850	0.31	2.2	3.2	2.2	212
24168MB	340	580	243	5	4400	8500	450	560	0.43	1.6	2.3	1.5	266
24168K30.MB	340	580	243	5	4400	8500	450	560	0.43	1.6	2.3	1.5	266

Spherical Roller Bearings

23972K.MB	360	480	90	3	1030	3200	560	700	0.17	4.1	6	4	47
23972MB	360	480	90	3	1030	3200	560	700	0.17	4.1	6	4	47
23072K.MB	360	540	134	5	2450	4800	530	670	0.25	2.7	4.1	2.7	111
23072MB	360	540	134	5	2450	4800	530	670	0.25	2.7	4.1	2.7	111
24072K30.MB	360	540	180	5	3150	6530	480	630	0.33	2.1	3.1	2	145
24072MB	360	540	180	5	3150	6530	480	630	0.33	2.1	3.1	2	145
23172K.MB	360	600	192	5	3740	7010	600	800	0.33	2.3	3.4	2.2	220
23172MB	360	600	192	5	3740	7010	600	800	0.33	2.3	3.4	2.2	220
24172MB	360	600	243	5	4500	9000	430	530	0.41	1.6	2.4	1.6	278
24172K30.MB	360	600	243	5	4500	9000	430	530	0.41	1.6	2.4	1.6	278
23272MB	360	650	232	6	4880	8490	430	560	0.35	1.9	2.9	1.8	344
23272K.MB	360	650	232	6	4880	8490	430	560	0.35	1.9	2.9	1.8	344
23976K.MB	380	520	106	4	1785	4000	630	850	0.19	3.6	5.3	3.5	70
23976MB	380	520	106	4	1785	4000	630	850	0.19	3.6	5.3	3.5	70
23076K.MB	380	560	135	5	2550	5300	500	630	0.25	2.8	4.2	2.8	117
23076MB	380	560	135	5	2550	5300	500	630	0.25	2.8	4.2	2.8	117
24076K30.MB	380	560	180	5	3150	6710	450	600	0.31	2.2	3.2	2.1	152
24076MB	380	560	180	5	3150	6710	450	600	0.31	2.2	3.2	2.1	152
23176K.MB	380	620	194	5	3740	7540	560	750	0.3	2.3	3.4	2.2	240
23176MB	380	620	194	5	3740	7540	560	750	0.3	2.3	3.4	2.2	240
24176MB	380	620	243	5	4650	9500	400	500	0.39	1.7	2.5	1.7	290
24176K30.MB	380	620	243	5	4650	9500	400	500	0.39	1.7	2.5	1.7	290
23276MB	380	680	240	6	5050	9660	400	530	0.35	1.9	2.9	1.8	375
23276K.MB	380	680	240	6	5050	9660	400	530	0.35	1.9	2.9	1.8	375
23980MB	400	540	106	4	1850	3990	600	800	0.18	3.7	5.5	3.6	72
23980K.MB	400	540	106	4	1850	3990	600	800	0.18	3.7	5.5	3.6	72
23080K.MB	400	600	148	5	3050	6200	450	560	0.24	2.8	4.1	2.7	152
23080MB	400	600	148	5	3050	6200	450	560	0.24	2.8	4.1	2.7	152
24080MB	400	600	200	5	3610	7545	430	460	0.33	2.1	2.4	2	205
24080K30.MB	400	600	200	5	3610	7545	430	460	0.33	2.1	2.4	2	205
23180K.MB	400	650	200	6	4100	7730	530	700	0.28	2.4	3.6	2.5	265
23180MB	400	650	200	6	4100	7730	530	700	0.28	2.4	3.6	2.5	265
24180MB	400	650	250	6	5100	10400	380	480	0.39	1.7	2.6	1.7	326
24180K30.MB	400	650	250	6	5100	10400	380	480	0.39	1.7	2.6	1.7	326
23280MB	400	720	256	6	5950	10807	380	500	0.35	1.9	2.9	1.8	450

Spherical Roller Bearings

23280K.MB	400	720	256	6	5950	10807	380	500	0.35	1.9	2.9	1.8	450
23984K.MB	420	560	106	4	1960	4130	600	800	0.18	3.8	5.7	3.8	75
23984MB	420	560	106	4	1960	4130	600	800	0.18	3.8	5.7	3.8	75
23084K.MB	420	620	150	5	3150	6550	450	560	0.24	2.8	4.2	2.8	160
23084MB	420	620	150	5	3150	6550	450	560	0.24	2.8	4.2	2.8	160
24084K30.MB	420	620	200	5	4000	8800	380	480	0.32	2.1	3.2	2.1	214
24084MB	420	620	200	5	4000	8800	380	480	0.32	2.1	3.2	2.1	214
24184C	420	700	224	6	4600	9000	500	670	0.33	2	3	2	363
23184CK	420	700	224	6	4600	9000	500	670	0.33	2	3	2	363
24184MB	420	700	280	6	6200	12700	400	500	0.33	2	3	2	443
24184K30.MB	420	700	280	6	6200	12700	400	500	0.33	2	3	2	443
23284MB	420	760	272	7.5	6575	11717	360	480	0.35	1.9	2.9	1.8	540
23284K.MB	420	760	272	7.5	6575	11717	360	480	0.35	1.9	2.9	1.8	540
23988K.MB	440	600	118	4	2100	4690	560	750	0.18	3.7	5.5	3.6	102
23988MB	440	600	118	4	2100	4690	560	750	0.18	3.7	5.5	3.6	102
23088K.MB	440	650	157	6	3400	7100	430	530	0.24	2.8	4.2	2.8	184
23088MB	440	650	157	6	3400	7100	430	530	0.24	2.8	4.2	2.8	184
24088K30.MB	440	650	212	6	4300	9650	360	450	0.32	2.1	3.2	2.1	249
24088MB	440	650	212	6	4300	9650	360	450	0.32	2.1	3.2	2.1	249
23188C	440	720	226	6	5250	10000	500	670	0.3	2.3	3.4	2.2	360
23188CK	440	720	226	6	5250	10000	500	670	0.3	2.3	3.4	2.2	360
24188MB	440	720	280	6	6400	13200	340	430	0.38	1.8	2.6	1.7	454
24188K30.MB	440	720	280	6	6400	13200	340	430	0.38	1.8	2.6	1.7	454
23288MB	440	790	280	7.5	7100	13400	360	480	0.35	1.9	2.9	1.8	595
23288K.MB	440	790	280	7.5	7100	13400	360	480	0.35	1.9	2.9	1.8	595
23992K.MB	460	620	118	4	2305	5036	530	700	0.18	3.8	5.7	3.8	105
23992MB	460	620	118	4	2305	5036	530	700	0.18	3.8	5.7	3.8	105
23092K.MB	460	680	163	6	2650	7650	400	500	0.24	2.8	4.2	2.8	210
23092MB	460	680	163	6	2650	7650	400	500	0.24	2.8	4.2	2.8	210
24092K30.MB	460	680	218	6	4370	9570	380	500	0.31	2.2	3.2	2.1	280
24092MB	460	680	218	6	4370	9570	380	500	0.31	2.2	3.2	2.1	280
23192C	460	760	240	7.5	5760	11025	480	630	0.3	2.3	3.4	2.2	441
23192CK	460	760	240	7.5	5760	11025	480	630	0.3	2.3	3.4	2.2	441
24192MB	460	760	300	7.5	7500	15600	320	400	0.39	1.7	2.6	1.7	578
24192K30.MB	460	760	300	7.5	7500	15600	320	400	0.39	1.7	2.6	1.7	578

Spherical Roller Bearings

23292MB	460	830	296	7.5	7560	13970	340	450	0.35	1.9	2.9	1.9	695
23292K.MB	460	830	296	7.5	7560	13970	340	450	0.35	1.9	2.9	1.9	695
23996K.MB	480	560	128	5	2525	5500	450	600	0.18	3.8	5.6	3.7	128
23996MB	480	560	128	5	2525	5500	450	600	0.18	3.8	5.6	3.7	128
23096K.MB	480	700	165	6	3800	8150	380	480	0.23	2.9	4.3	2.8	220
23096MB	480	700	165	6	3800	8150	380	480	0.23	2.9	4.3	2.8	220
24096K.30.MB	480	700	218	6	4900	11200	340	430	0.3	2.3	3.3	2.2	288
24096MB	480	700	218	6	4900	11200	340	430	0.3	2.3	3.3	2.2	288
23196C	480	790	248	7.5	5800	11800	450	600	0.3	2.3	3.4	2.2	485
23196CK	480	790	248	7.5	5800	11800	450	600	0.3	2.3	3.4	2.2	485
24196MB	480	790	308	7.5	8000	16600	320	400	0.39	1.8	2.6	1.7	639
24196K30.MB	480	790	308	7.5	8000	16600	320	400	0.39	1.8	2.6	1.7	639
23296MB	480	870	310	7.5	8800	17000	340	430	0.37	1.8	2.7	1.8	835
23296K.MB	480	870	310	7.5	8800	17000	340	430	0.37	1.8	2.7	1.8	835
239/500K.MB	500	670	128	5	2500	6090	480	630	0.17	3.9	5.8	3.8	130
239/500MB	500	670	128	5	2500	6090	480	630	0.17	3.9	5.8	3.8	130
230/500K.MB	500	720	167	6	3900	8500	380	480	0.22	3	4.5	2.9	229
230/500MB	500	720	167	6	3900	8500	380	480	0.22	3	4.5	2.9	229
240/500K30.MB	500	720	218	6	4900	11200	320	400	0.29	2.3	3.5	2.3	297
240/500MB	500	720	218	6	4900	11200	320	400	0.29	2.3	3.5	2.3	297
231/500K.MB	500	830	264	7.5	6550	13200	430	560	0.3	2.3	3.4	2.2	580
231/500MB	500	830	264	7.5	6550	13200	430	560	0.3	2.3	3.4	2.2	580
241/500MB	500	830	325	7.5	8650	18300	300	380	0.39	1.7	2.6	1.7	753
241/500K30.MB	500	830	325	7.5	8650	18300	300	380	0.39	1.7	2.6	1.7	753
232/500MB	500	920	336	7.5	9650	18300	320	400	0.38	1.8	2.7	1.7	1010
232/500K.MB	500	920	336	7.5	9650	18300	320	400	0.38	1.8	2.7	1.7	1010
239/530MB	530	710	136	5	2980	6755	450	600	0.18	3.8	5.7	3.8	150
239/530K.MB	530	710	136	5	2980	6755	450	600	0.18	3.8	5.7	3.8	150
230/530MB	530	780	185	6	4400	9500	340	430	0.22	3	4.5	3	310
230/530K.MB	530	780	185	6	4400	9500	340	430	0.22	3	4.5	3	310
240/530MB	530	780	250	6	5640	12800	340	450	0.31	2.2	3.2	2.1	410
240/530K30.MB	530	780	250	6	5640	12800	340	450	0.31	2.2	3.2	2.1	410
241/530MB	530	870	335	7.5	9500	20000	280	360	0.38	1.8	2.6	1.7	838
241/530K30.MB	530	870	335	7.5	9500	20000	280	360	0.38	1.8	2.6	1.7	838
231/530K.MB	530	870	272	7.5	7625	15000	400	530	0.3	2.3	3.4	2.2	645

Spherical Roller Bearings

231/530MB	530	870	272	7.5	7625	15000	400	530	0.3	2.3	3.4	2.2	645
239/560K.MB	560	750	140	5	3100	7650	340	430	0.17	4	5.9	3.9	183
239/560MB	560	750	140	5	3100	7650	340	430	0.17	4	5.9	3.9	183
230/560K.MB	560	820	195	6	5100	11000	320	400	0.23	2.9	4.4	2.9	358
230560MB	560	820	195	6	5100	11000	320	400	0.23	2.9	4.4	2.9	358
240/560K30.MB	560	820	258	6	6400	14600	280	360	0.31	2.2	3.3	2.2	469
240/560MB	560	820	258	6	6400	14600	280	360	0.31	2.2	3.3	2.2	469
231/560K.MB	560	920	280	7.5	8294	16295	380	500	0.3	2.3	3.4	2.2	740
231/560MB	560	920	280	7.5	8294	16295	380	500	0.3	2.3	3.4	2.2	740
241/560MB	560	920	355	7.5	10600	22400	260	340	0.38	1.8	2.6	1.7	979
241/560K30.MB	560	920	355	7.5	10600	22400	260	340	0.38	1.8	2.6	1.7	979
239/600K.MB	600	800	150	5	3450	8650	320	400	0.17	4	5.9	3.9	221
239/600MB	600	800	150	5	3450	8650	320	400	0.17	4	5.9	3.9	221
230/600K.MB	600	870	200	6	5700	12500	300	380	0.22	3.1	4.6	3	406
230/600MB	600	870	200	6	5700	12500	300	380	0.22	3.1	4.6	3	406
240/600K30.MB	600	870	272	6	7100	16600	260	340	0.31	2.2	3.3	2.2	550
240/600MB	600	870	272	6	7100	16600	260	340	0.31	2.2	3.3	2.2	550
231/600MB	600	980	300	7.5	9000	19300	280	360	0.31	1.8	2.7	2.2	933
231/600K.MB	600	980	300	7.5	9000	19300	280	360	0.31	1.8	2.7	2.2	933
241/600MB	600	980	375	7.5	11600	26000	240	320	0.38	1.8	2.7	1.8	1180
241/600K30.MB	600	980	375	7.5	11600	26000	240	320	0.38	1.8	2.7	1.8	1180
239/630K.MB	630	850	165	6	4290	9910	380	500	0.18	3.8	5.7	3.7	280
239/630MB	630	850	165	6	4290	9910	380	500	0.18	3.8	5.7	3.7	280
230/630K.MB	630	920	212	7.5	6300	14000	260	340	0.31	2.2	3.3	2.2	661
230/630MB	630	920	212	7.5	6300	14000	260	340	0.31	2.2	3.3	2.2	661
240/630K30.MB	630	920	290	7.5	8000	19000	260	340	0.31	2.2	3.3	2.2	661
240/630MB	630	920	290	7.5	8000	19000	260	340	0.31	2.2	3.3	2.2	661
241/630MB	630	1030	400	7.5	12900	29000	240	320	0.38	1.8	2.7	1.7	1410
241/630K30.MB	630	1030	400	7.5	12900	29000	240	320	0.38	1.8	2.7	1.7	1410
239/670K.MB	670	900	170	6	4300	10600	280	360	0.17	4	5.9	3.9	326
239/670MB	670	900	170	6	4300	10600	280	630	0.17	4	5.9	3.9	326
230/670K.MB	670	980	230	7.5	7200	16000	260	340	0.22	3	4.5	2.9	602
230/670MB	670	980	230	7.5	7200	16000	260	340	0.22	3	4.5	2.9	602
240/670K30.MB	670	980	308	7.5	9000	21600	240	320	0.31	2.2	3.3	2.2	802
240/670MB	670	980	308	7.5	9000	21600	240	320	0.31	2.2	3.3	2.2	802

Spherical Roller Bearings

241/670MB	670	1090	412	7.5	14000	31500	220	300	0.37	1.8	2.7	1.8	1610
241/670K30.MB	670	1090	412	7.5	14000	31500	220	300	0.37	1.8	2.7	1.8	1610
239/710K.MB	710	950	180	6	4800	12000	260	340	0.18	3.8	5.7	3.8	386
239/710MB	710	950	180	6	4800	12000	260	340	0.18	3.8	5.7	3.8	386
230/710K.MB	710	1030	236	7.5	7650	17000	260	340	0.22	3.1	4.6	3	670
230/710MB	710	1030	236	7.5	7650	17000	260	340	0.2	3.1	4.6	3	670
240/710K30.MB	710	1030	315	7.5	9500	22800	220	300	0.3	2.3	3.4	2.2	889
240/710MB	710	1030	315	7.5	9500	22800	220	300	0.3	2.3	3.4	2.2	889
241/710MB	710	1150	438	9.5	15600	35500	200	280	0.38	1.8	2.7	1.8	1910
241/710K30.MB	710	1150	438	9.5	15600	35500	200	280	0.38	1.8	2.7	1.8	1910
239/750K.MB	750	1000	185	6	5200	12900	260	340	0.17	4	5.9	3.9	437
239/750MB	750	1000	185	6	5200	12900	260	340	0.17	4	5.9	3.9	437
230/750K.MB	750	1090	250	7.5	8500	19000	240	320	0.22	3	4.5	2.9	806
230/750MB	750	1090	250	7.5	8500	19000	240	320	0.22	3	4.5	2.9	806
240/750K30.MB	750	1090	335	7.5	9960	23700	220	300	0.29	2.3	3.5	2.3	1065
240/750MB	750	1090	335	7.5	9960	23700	220	300	0.29	2.3	3.5	2.3	1065
239/800K.MB	800	1060	195	6	5850	15000	240	320	0.17	4.1	6	4	506
239/800MB	800	1060	195	6	5850	15000	240	320	0.17	4.1	6	4	506
230/800K.MB	800	1150	258	7.5	9300	21200	220	300	0.22	3.1	4.6	3	906
230/800MB	800	1150	258	7.5	9300	21200	220	300	0.22	3.1	4.6	3	906
240/800K30.MB	800	1150	345	7.5	11600	28500	190	260	0.29	2.3	3.5	2.3	1200
240/800MB	800	1150	345	7.5	11600	28500	190	260	0.29	2.3	3.5	2.3	1200
239/900K.MB	900	1180	200	6	6930	17120	280	360	0.16	4.3	6.4	4.2	605
239/900MB	900	1180	200	6	6930	17120	280	360	0.16	4.3	6.4	4.2	605
230/900MBKMB	900	1280	280	7.5	11000	26500	200	280	0.22	3.1	4.7	3.1	1210
230/900MBKMB	900	1280	280	7.5	11000	26500	200	280	0.22	3.1	4.7	3.1	1210
240/900MB	900	1280	375	7.5	14000	36500	170	220	0.28	2.4	3.6	2.4	1600
240/900K30.MB	900	1280	375	7.5	14000	36500	170	220	0.28	2.4	3.6	2.4	1600
239/950MB	950	1250	224	7.5	7500	20000	190	260	0.16	4.2	6.3	4.1	776
239/950K.MB	950	1250	224	7.5	7500	20000	190	260	0.16	4.2	6.3	4.1	776
240/950MB	950	1360	412	7.5	16300	41500	160	200	0.29	2.3	3.5	2.3	2010
240/950K30.MB	950	1360	412	7.5	16300	41500	160	200	0.29	2.3	3.5	2.3	2010
239/1000MB	1000	1320	236	7.5	8150	21600	180	240	0.16	4.2	6.3	4.1	921
239/1000K.MB	1000	1320	236	7.5	8150	21600	180	240	0.16	4.2	6.3	4.1	921
240/1000MB	1000	1420	412	7.5	16600	42500	150	190	0.28	2.4	3.6	2.3	2150

Spherical Roller Bearings

240/1000k30.MB	1000	1420	412	7.5	16600	42500	150	190	0.28	2.4	3.6	2.3	2150
239/1060MB	1060	1400	250	7.5	9800	26000	170	220	0.17	4.1	6	4	1110
239/1060K.MB	1060	1400	250	7.5	9800	26000	170	220	0.17	4.1	6	4	1110
240/1060MB	1060	1500	438	9.5	18600	50000	140	180	0.27	0.27	3.7	2.4	2530
240/1060K30.MB	1060	1500	438	9.5	18600	50000	140	180	0.27	0.27	3.7	2.4	2530
239/1120MB	1120	1460	250	7.5	10200	27500	160	200	0.16	4.3	6.4	4.2	1150
239/1120K.MB	1120	1460	250	7.5	10200	27500	160	200	0.16	4.3	6.4	4.2	1150
240/1120MB	1120	1580	462	9.5	20800	55000	140	180	0.28	2.4	3.6	2.4	2910
240/1120K30.MB	1120	1580	462	9.5	20800	55000	140	180	0.28	2.4	3.6	2.4	2910
239/1180MB	1180	1540	272	7.5	11400	31000	150	190	0.17	4.1	6	4	1410
239/1180K.MB	1180	1540	272	7.5	11400	31000	150	190	0.17	4.1	6	4	1410
249/1250CA/W33	1250	16300	375	7.5	15200	43400			0.2	3.4	5	3.2	2100
230/1250CA/W33	1250	17500	375	9.5	17900	43400			0.19	3.6	5.3	3.6	2840
248/1320CAF/W20	1320	1600	280	6	9780	31800			0.15	4.5	6.7	4.5	1160
249/1320CAF/W33	1320	1720	400	7.5	16100	46000			0.21	3.2	4.8	3.2	2500
249/1320CAB/W33	1320	1720	400	7.5	17900	53400			0.21	3.2	4.8	3.2	2500
248/1500FA/W20	1500	1820	315	7.5	10700	36800			0.15	4.5	6.7	4.5	1700
249/1500CAFB/W33	1500	1950	450	9.5	20700	59800			0.2	3.4	5	3.2	3550
248/1800FA/W20	1800	2180	375	9.5	15400	55200			0.15	4.5	6.7	4.5	2900